


# IQ211 Controller



## Features and Highlights

- Fully programmable DDC controller with PID loops
- 1 second program cycle time
- 1000 point data logs
- Stand-alone or integrated system operation
- 5 time schedules and optimum start
- 2-part connectors for ease of wiring
- 2 thermistor, 1 universal analog, and 2 digital inputs
- Six 24 VAC triac outputs

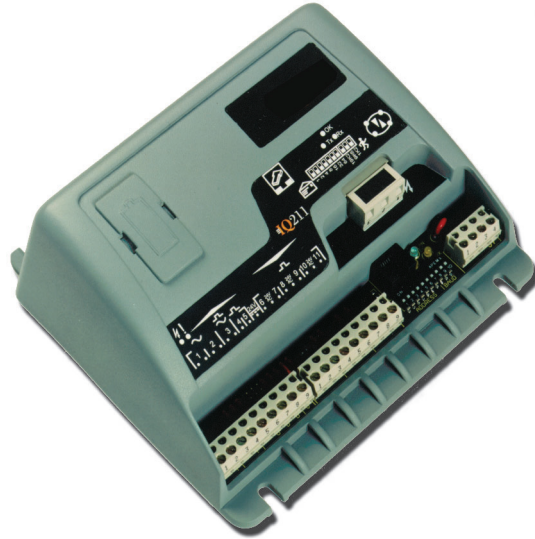

The Novar IQ211 controller is a unitary terminal unit controller with five inputs and six triac outputs for use in a building automation system (BAS). Fully compatible with other Novar IQ controllers, the IQ211 communicates with other devices through the IQ Network.

Use one of the Novar IQ Supervisor programs to access information in the IQ211 and use the System Engineering Tool (SET) software to program it. You can configure the IQ211 across the IQ network or connect directly to the unit.

### NOVAR CONTROLS

6670 185th Avenue NE Redmond, WA 98052

Telephone: (425) 869-8400

E-mail: [ntcinfo@novarcontrols.com](mailto:ntcinfo@novarcontrols.com)

Fax: (425) 869-8445

Web site: [ntc.novarcontrols.com](http://ntc.novarcontrols.com)

## Technical Data

- **Power** 24 VAC +/-10% 50 to 60 Hz. 13 VA maximum consumption.
- **Auxiliary Power** 24 VDC +/-15% at 50mA independent of configuration.
- **Battery Backup** Non-rechargeable lithium plug cell (Saft LS3, 3.6 V, 1/2AA, 950 mAh or equivalent) maintains time and logged data with power off for 5 years minimum.
- **Inputs** 2 thermistor, 1 universal analog, and 2 digital inputs with 12-bit resolution.
- **Outputs** 6 triac outputs.
- **Baud rate** Switch selectable rate of 1200, 9600, or 19200. Must match other nodes on the LAN.
- **Processor & Memory** 128 Kb battery-backed SRAM and 256 Kb flash memory.
- **Controller Dimensions** 6.22" (158mm) x 5.59" (142mm) x 2.8" (71mm).
- **Environmental** 32–113°F (0–45°C). 0–90% RH, non-condensing.
- **Ratings** Listed Underwriters Laboratory for Enclosed Energy Management Equipment under the UL Standard for Safety 916. U.S. certification.

## Ordering Information

Item Number	Description
882000230	IQ211 Controller

### NOVAR CONTROLS

6670 185th Avenue NE Redmond, WA 98052

Telephone: (425) 869-8400

E-mail: [ntcinfo@novarcontrols.com](mailto:ntcinfo@novarcontrols.com)

Fax: (425) 869-8445

Web site: [ntc.novarcontrols.com](http://ntc.novarcontrols.com)