


IQ228 Controller



Features and Highlights

- Fully programmable DDC controller
- 1 second cycle time
- 1000 point data logs
- Integral or external 2-line display options
- 3-point mounting to facilitate installation
- 2-part connectors for ease of wiring
- 7 universal inputs and 1 digital input

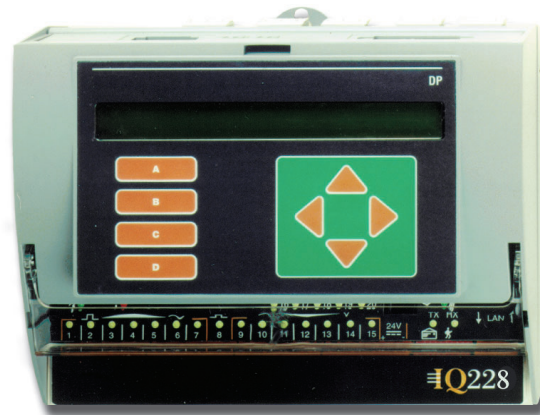

The IQ228 is a medium sized controller with seven universal inputs and one digital input. It accomodates a broad range of input monitoring applications.

When used in a building automation system, the IQ228 connects to other devices through the Novar IQ Network, which allows you to share information across the entire system. Use one of the Novar IQ Supervisor programs to access information in the IQ228.

NOVAR CONTROLS

6670 185th Avenue NE Redmond, WA 98052

Telephone: (425) 869-8400

E-mail: ntcinfo@novarcontrols.com

Fax: (425) 869-8445

Web site: ntc.novarcontrols.com

Technical Data

- **Power** 24 VAC 50 to 60 Hz. 13 VA maximum consumption.
- **Auxiliary Power** 24 VDC for relay modules. At least 100mA is available independent of input/output usage or of a connected 2-line display panel or NDP.
- **Battery Backup** Non-rechargeable lithium plug cell (Saft LM2450, 3 V or equivalent) maintains time and logged data for 5 years minimum with power off.
- **Inputs** 7 universal inputs and 1 digital input.
- **Baud rate** Switch selectable rate of 1200, 9600, or 19200. Must match other nodes on the LAN.
- **Processor & Memory** 128 Kb battery-backed SRAM and 256 Kb flash memory.
- **Controller Dimensions** 9.05" (230mm) x 7.125" (181mm) x 2.78" (71mm).
- **Environmental** 32–113°F (0–45°C). 0–90% RH, non-condensing.
- **Ratings** Listed Underwriters Laboratory for Enclosed Energy Management Equipment under the UL Standard for Safety 916. U.S. certification.

Ordering Information

Item number	Description
882000180	IQ228 Controller
882000190	IQ228 Controller + 2-line display panel in cover

NOVAR CONTROLS

6670 185th Avenue NE Redmond, WA 98052

Telephone: (425) 869-8400

E-mail: ntcinfo@novarcontrols.com

Fax: (425) 869-8445

Web site: ntc.novarcontrols.com